



Harvey Construction Corporation  
10 Harvey Road  
Bedford, NH 03110  
Telephone (603) 624-4600  
Facsimile (603) 668-0389  
www.harveyconstruction.com

January 15, 2015

**Capt. William Breault**  
**Dover Police Department**  
**Field Operations Division**  
**Dover, NH Police Department**

RE: Recommendation of Award  
**REDIMIX COMPANIES, INC.**  
Concrete Redimix Materials  
Dover Police Facility and Public Parking Garage/Orchard Street Reconstruction

Dear Mr. Breault,

Harvey Construction is seeking approval to award the **Concrete Redimix Materials** contracts for subject project to **REDIMIX COMPANIES, INC.** for the total amount of **Three Hundred Seven Thousand One Hundred Eighty Two Dollars and 0.00/100 (\$307,182.00)**. Scope of work in accordance with the Dover Police Facility and Public Parking Garage Plans dated 11/17/14, Site Development Plans dated 6/30/14 and Orchard Street Reconstruction – Subdivision Plans dated June 2014 prepared by CLD Engineers and Lavallee Brensinger.

This award is based on the attached cost proposal and our bid tabulation spreadsheet.

If you have any question or concerns, please advise.

Very Truly Yours,

Harvey Construction Corporation

Andrew P. Marino, P.E., LEED AP  
Project Manager

I hereby authorize Harvey Construction to enter into a contract agreement with the aforementioned subcontractor/supplier on behalf of the City of Dover for the amount stated above.

\_\_\_\_\_  
**Capt. William Breault**

1/15/15  
\_\_\_\_\_  
Date

Harvey Construction  
Job: DOVER PD/PARKING GARAGE

Bid Tabulation Sheet  
Bid Date: 12/19/2014

Trade:	CAST IN PLACE CONCRETE - REBAR	HCC Budget	Co. Contact: REDIMIX Wayne Tarr Phone: 296-6520	12/17/2014	Co. Contact: COLEMAN Bruce Mailman Phone: 447-5836	12/19/2015	Co. Contact: AGGREGATE Dave Osgood Phone: 231-7455	12/19/2015	
Spec. Sections:	03 30 00/03 30 00.01								
Scope Check List									
Base Bid									
SCHEDULE	Per HCC Project Schedule dated 12/10/14								
			Volume (CY)	\$/CY	Price	Volume (CY)	\$/CY	Price	
<b>POLICE</b>									
877	3000psi Walls/Grade Beams/Pile Cap & Elev Pit	\$ 93,072	853	92 \$	78,476	853	105 \$	89,565	
	Add Mid Range		853	3 \$	2,559	853	2 \$	1,706	
	Winter Service		853	5.5 \$	4,692	853	0 \$	-	
759	3000psi SOD/DECK	\$ 76,255	710	92 \$	65,320	710	129 \$	91,590	
	Add Mid Range		710	3 \$	2,130	710	2 \$	1,420	
365	1% Accelerator Slabs	\$ 4,015	710	5.5 \$	3,905	710	6 \$	4,260	
	32 Stairs	\$ 3,232	32	92 \$	2,944	32	105 \$	3,360	
	4 Locker Bases	\$ 404	4	92 \$	368	4	105 \$	420	
	4 Housekeeping Pads	\$ 404	4	92 \$	368	4	105 \$	420	
	Add Mid Range		40	3 \$	120	40	2 \$	80	
<b>GARAGE</b>									
915	4000psi Ret Walls/Footings/Grade Beams	\$ 92,415	989	98 \$	96,922	989	129 \$	127,581	
	Add Mid Range		989	3 \$	2,967	989	2 \$	1,978	
	Winter Service		989	5.5 \$	5,440	989	0 \$	-	
36	5000psi Piers	\$ 4,359	36	100 \$	3,600	36	135 \$	4,860	
	Add High Range		36	6 \$	216	36	6 \$	216	
	Winter Service		36	5.5 \$	198	36	0 \$	-	
	16 4000psi SOG Toppings	\$ 2,352	140	98 \$	13,720	140	129 \$	18,060	
	Add Mid Range		140	3 \$	420	140	2 \$	280	
66	1% Accelerator	\$ 363	140	5.5 \$	770	140	6 \$	840	
<b>SITE</b>									
10	Generator Pad	\$ 2,895	10	98 \$	980	10	129 \$	1,290	
180	4000psi Sidewalks	\$ 18,810	180	98 \$	17,640	180	129 \$	23,220	
8	Site Walls & Footings	\$ 836	8	98 \$	784	8	129 \$	1,032	
10	4000psi Site Stairs	\$ 1,045	10	98 \$	980	10	129 \$	1,290	
	Add Fiber Mesh		208	8 \$	1,664	208	6 \$	1,248	
<b>Total</b>		<b>\$ 300,457</b>			<b>\$ 307,182</b>			<b>\$ 374,716</b>	<b>\$ 333,292</b>

# REDIMIX COMPANIES, INC.

Concrete suppliers to the construction industry.

www.redimixcompanies.com


1 Sundial Ave., Suite 310  
Manchester, NH 03103  
Phone (603) 296-6500  
Fax (603) 296-6520  
Toll Free 1-800-400-9474

**MANCHESTER**  
Redimix Concrete

**NASHUA**  
Redimix Concrete

**PERSONS**  
Concrete

**SEACOAST**  
Redimix Concrete

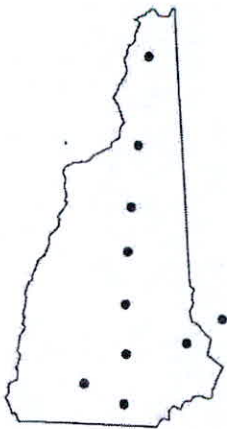

**Batch Plants in:**

- Columbia • Littleton
- Campton • Laconia
- Bow • Manchester
- Amherst • Nashua
- Dover • Berwick, ME

Updated December 17, 2014  
Via e-mail to: jpollock@hccnh.com

Harvey Construction Corporation  
10 Harvey Road  
Bedford, NH 03110

Attn: Mr. Joe Pollock

Project: Dover Police Facility and Parking Garage-Dover, NH

Subject: Concrete Supply Proposal

Please find below unit pricing for ready mix concrete delivered to the above referenced project.

Class Concrete	\$/per Cubic Yard
3000 PSI	92.00*
4000 PSI	98.00*
5000 PSI	100.00***

\*Note: These concrete mixes require a Mid Range Water Reducer to obtain a workable 4.5-6" slump.

\*\*Note: The 4000 PSI price is locked for project. Below escalation does not apply to 4000 PSI.

\*\*\*Note: This Mix requires a High Range Water Reducer to obtain workable slump.

Other Items:

CNI Corrosion Inhibitor	12.00/gallon
Fiber	8.00
Mid Range Water Reducer	3.00
High Range Water Reducer	6.00
1% Non Chloride Accelerators	5.50
2% Non Chloride Accelerators	10.00
Winter Service (Nov 1 – April 15 )	5.50

Price Increase: January 1, 2016 6.00

Delivery hours are Monday-Friday 7:00 AM to 4:30 PM. Weekend or overtime deliveries beyond these times will be gladly scheduled however, additional labor charges will apply. The above pricing will be honored for 30 days.

Thank you for the opportunity to quote this project. Please do not hesitate to call me if there are any questions regarding this proposal at (603) 296-6502 or by e-mail at wtarr@redimixcompanies.com.

Sincerely,

Wayne A. Tarr