


HOW TO USE YOUR METAL YARN BALL WINDER



STEP 1.

Place the feeding wire arm between the washer and the base plate. Position the wire arm so the end loop is behind the small Phillips screw. This helps lock the wire arm and prevents it from moving. Hand tighten the butterfly screw to secure the wire arm.

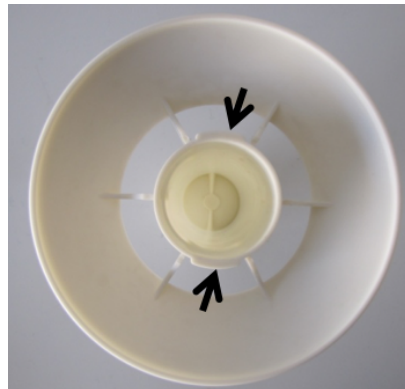

STEP 2.

Tightly clamp the winder to the edge of a sturdy table.




STEP 3.

Align the bobbin and the base of the winder at the locations shown by arrows. Push the bobbin all the way down. With one hand holding the proximal wire arm to prevent the base from rotating, use the other hand to turn the bobbin clockwise to lock it down.

STEP 4.

Thread the yarn first through the distal wire arm, then through the proximal wire arm, and finally position it tightly into the cleft of the bobbin. Begin turning the crank on the ball winder to start winding.

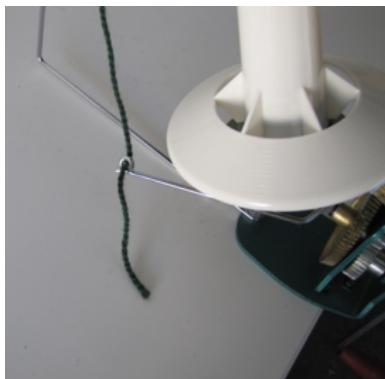

ANY QUESTIONS PLEASE CONTACT US AT:
stanwoodimports@yahoo.com
sales@orientalhomegarden.com

Tel: (888) 670-5570

Copyright © Stanwood Imports / Oriental Touch LLC

